


Life Support CO₂ Removal

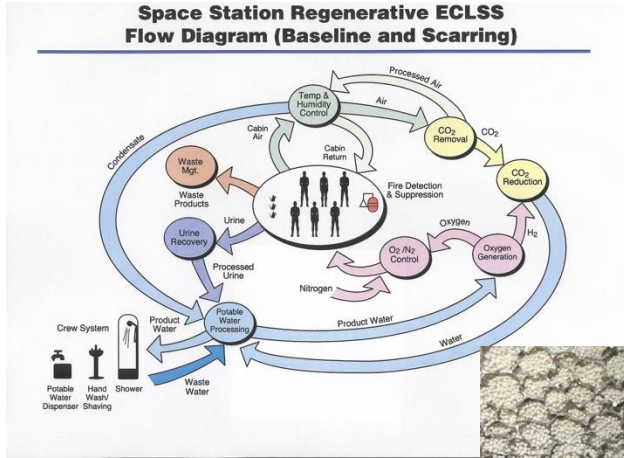

Name of Technology:

High Reliable, Closed-loop-forward Carbon Dioxide Removal Systems

Participating NASA Centers:

JSC (Lead); ARC, GRC, JPL, KSC, MSFC

Technological Area:

T6.01 Innovative Solutions to Carbon Dioxide Removal for Spacecraft, Surface Systems, and EVA Systems

Vision for the Technology:

For future exploration missions, NASA needs a highly reliable Carbon Dioxide (CO₂) removal system that is compatible with closed-loop life support, low maintenance, and can maintain cabin CO₂ at <3.0 mmHg.

Challenges:

The State-of-the-Art (SOA) Carbon Dioxide (CO₂) removal systems have required considerable maintenance, although recent improvements have decreased that to greater than 3 years between unplanned maintenance. Secondary CO₂ removal systems are required to operate during maintenance.

The International Space Station (ISS) Carbon Dioxide Removal Assembly (CDRA) provides CO₂ removal at the required levels and is compatible with closed-loop life support. However, the CDRA requires replacement of

the adsorption beds (currently >3 years lifetime) and for the secondary CO₂ removal system to operate during those periods of down-time. The current CDRA technologies work for the large volume of ISS but will not work in smaller exploration spacecraft.

In addition to the current system challenges, ISS CDRA is not available due to obsolescence of the sorbent materials. New materials could be used but may result in reduced performance and/or high quantities of resupply to mitigate dust.

NASA Seeks to Meet the Following Specs:

Successful closure of this gap will be determined through (based on 4-person load):

- 1) Demonstration of CO₂ removal at:
 - a. <2.5 mmHg-enabling
 - b. <2.3 mmHg-enhancing (1 hour average)
- 2) Greater than 3 years maintenance
- 3) Minimal crew intervention/maintenance
- 4) Removal rate of 4.16 kg/day
- 5) System size ≤0.3 cubic meters
- 6) System power use ≤500 watts of power
- 7) System mass of ≤100 kilograms
- 8) Effectively separate out water vapor (less than 100 ppm water vapor in the CO₂ product is desired)
- 9) Effectively separate out oxygen and nitrogen (less than 1% O₂ and 2% N₂ by volume in the CO₂ product is desired)

Overview of Student Project:

NASA seeks innovative Carbon Dioxide (CO₂) removal technologies that can maintain cabin CO₂ meeting the desired goals including low power and maintenance, and work in a closed-loop life support system. Technologies need to collect and remove CO₂ from the spacecraft cabin. Technologies that can utilize the removed CO₂ for other beneficial usages are of interest to NASA as well.

This technology spec sheet was produced by

Innovative Areas Student Projects Can Address:

- Innovative Carbon Dioxide (CO₂) removal technologies
- Develop alternative technologies to accomplish NASAs goals

Project Phases

- I. Conceptual and feasibility study with characteristics
- II. Proof of Concept/Prototype in lab environment

Research Funded by NASA on this Topic:

Proposal Number: 02-II B3.01-7618
[Carbon-Supported Amine Sorbent Monoliths for Carbon Dioxide Removal](#)

Proposal Number: 11-1 X3.01-8150
[Bio-Electrochemical Carbon Dioxide Removal for Air Revitalization in Exploration Life Support Systems](#)

Proposal Number: 21-1- H3.05-1771
[Additively-Manufactured, Net-Shape Adsorbent Beds for Carbon Dioxide Removal](#)

Proposal Number: 22-1- H4.07-2816
[MOF based Adsorbents for Carbon Dioxide Removal Assembly](#)

Proposal Number: 12.01-2228
[Removal of Carbon Dioxide from Spacecraft Atmosphere by Selective Membranes](#)

References:

[H3.08Challenges in Carbon Dioxide Removal and Reduction: Carbon Particulate and Thermal Management](#)

[T6.01Innovative Solutions to Carbon Dioxide Removal for Spacecraft, Surface Systems, and EVA Systems](#)

[H3.01Advancements in Carbon Dioxide Reduction: Critical Subsystems and Solid Carbon Repurposing](#)

[X3.01Spacecraft Cabin Atmospheric Resource Management and Particulate Matter Removal](#)

[International Space Station Carbon Dioxide Removal Assembly \(CDRA\)](#)

This technology spec sheet was produced by

